


CTM Series

Industrial Cold Water Pressure Washers

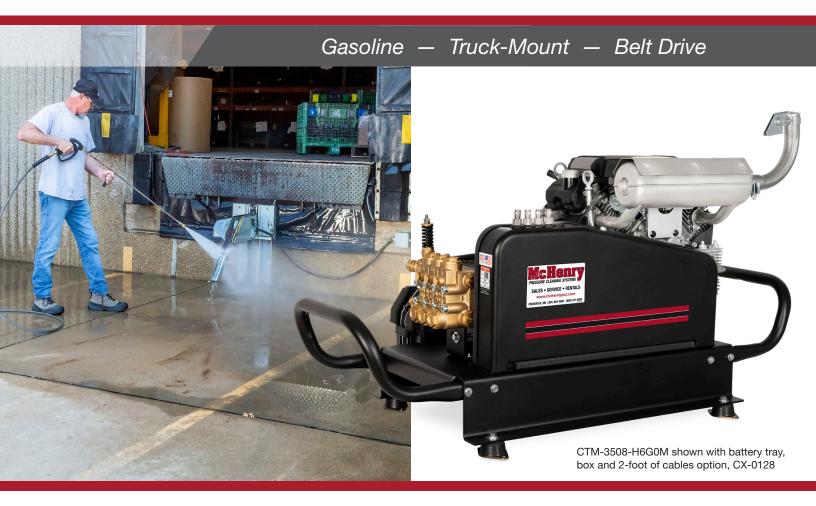

This cold-water truck-mount series is designed for mobile cleaning.

Mount it to a truck or trailer with a water tank and clean anywhere, anytime.

It's ideal for industrial cleaning and remote locations.

INSTALLATION

- · Mount on a truck or trailer
- Requires 200-gallon or larger water tank (Not included)

ENGINE

- Recoil start engine on CTM-3005-H6G0M (Electric start option available)
- Electric start standard on CTM-3508-H6G0M (Battery tray, box and cables option available for both units)

PUMP

- Equipped with Mi-T-M Pressure Relief Start
- External bypass system protects from heat build-up
- Forged brass manifold
- Thermal relief valve
- Water filter with clear sleeve for screen inspection (CTM-3005-H6G0M)
- ¾-inch barb inlet (CTM-3508-H6G0M)

FRAME

- · Powder coated steel frame
- 11/4-inch tube handles
- · Two-piece, enclosed belt guard
- Mounting plate with rubber isolators

UNIT INCLUDES

• Quick connect nozzles – 0°, 15°, 25° and 40°

ACCESSORIES AVAILABLE (SOLD SEPARATELY)

- 50-foot x3/8-inch non-marking hose
- 48-inch lance with insulated trigger gun
- Rotating nozzle, 5100-PSI rated

LIMITED WARRANTIES

- 1 year Mi-T-M unloader
- 3 year Honda engine
- 7 year General pump



CTM Series

Cold Water - Gasoline - Truck-Mount - Belt Drive

MODEL NUMBER	PSI	GPM	DISPLACEMENT/ENGINE	PUMP	UNLOADER	FUEL TANK CAPACITY	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
CTM-3005-H6G0M	3000	5.0	389cc Honda GX390 OHV+	General	Mi-T-M, factory preset	1.6 gallons	46x20.5x24in.	260 lb.	210 lb.
CTM-3508-H6G0M	3500	8.0	688cc Honda GX690 OHV with electric start - battery not included	General	Mi-T-M, factory preset	N/A	46x20.5x28.5in.	307 lb.	257 lb.

Note: All gasoline models sold in California are required to have a CARB compliant engine. Consult factory.

+49 state engine. Not for sale in California.

ACCESSORIES AND OPTIONS:

PART NUMBER	DESCRIPTION	FITS MODELS
851-0006	50-foot x %-inch non-marking hose – Adds a hose to the unit	All models
851-0371	48-inch lance with insulated trigger gun – Adds 48-inch lance with trigger gun to the unit, 5000-PSI, stainless-steel	All models
AW-7510-0055	Rotating nozzle – Increase your cleaning power and decrease your cleaning time, 5100-PSI rated, 5.5 orifice size	CTM-3005-H6G0M
CX-0127	Electric start – sealed battery included – For easy starting	CTM-3005-H6G0M
CX-0128	Battery tray, box and 2-foot of cables – Attaches to engine side of unit	All models
CX-0129*	Fuel tank, 10-gallon – Adds 10-gallon fuel capacity to unit, includes fuel tank, stand and hoses.	CTM-3508-H6G0M
CX-0130*	Fuel tank, 8-gallon – Adds 8-gallon fuel capacity to unit, includes fuel tank, stand and hoses.	CTM-3508-H6G0M

Note: Pressure washer hose and gun/wand assembly are not included, these are sold separately.

*Must be included with unit at the time of purchase to be EPA compliant.





CTM-3005-H6G0M shown with electric start option, CX-0127 and battery tray, box and 2-foot of cables option, CX-0128



• WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.